



SeekTech™ SR-20 Line Locator

Locate underground utility lines with speed, accuracy and confidence.

A large yellow arrow-shaped sign with a black border and a black arrow pointing to the right is positioned on the left side of the advertisement. The background of the sign is a dark grey with a pattern of lighter grey arrows pointing in various directions.

Get To The Point. Faster!



Electric



Cable



Water



Gas




Datacom



Telephone

RIDGID SeekTech™ SR-20 Line Locator

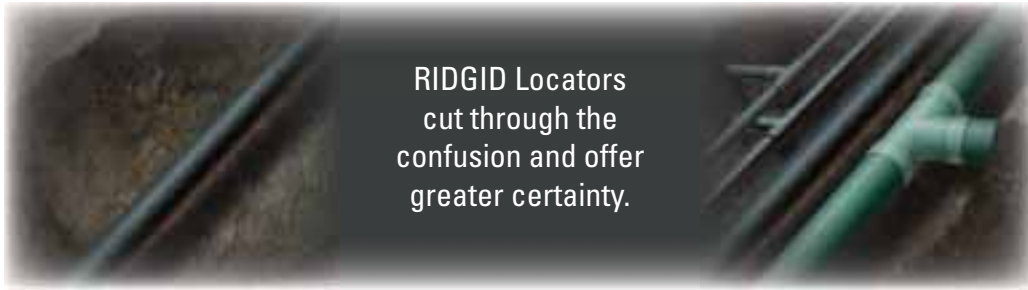

If life were simple, any old locator would do...

...You need the right tool.
You need RIDGID!

RIDGID *SeekTech*

All Locators Should Be This Good!

Ridge Tool's new line of locating equipment meets the most demanding needs of the locating professional by delivering...

■ **Speed** ■ **Accuracy** ■ **Confidence**

Introducing RIDGID SeekTech SR-20 Line Locator

Advanced processing power, combined with an innovative mapping display, allows you to find buried utilities with Speed, Accuracy and Confidence.

The SR-20 Provides: **Advanced Technology**

- Omni-directional antennas.
- Innovative signal processing.

More Information

- Easy-to-read mapping display.
- All of the information on one screen.

...All in an easier-to-learn-and-use tool.



SR-20

Omni-Directional Antennas

The productivity improvements of the large mapping display are delivered by the omni-directional antennas. The antennas allow you to:

- Hold the locator in any orientation.
- Trace a line even when traffic or obstructions force you off of the side of the line.
- Perform inductive and passive sweeps from any direction.
- Identify all energized lines in an area regardless of their orientation.


Accuracy Multiple underground lines and congested areas can cause signal distortion and make it difficult to get an accurate locate. With the SR-20, you will quickly see this distortion and improve accuracy with:

- Guidance Arrows, Signal Strength and Proximity Signal to verify the locate.
- Continual Depth and Current to verify you are still on the target line.
- Multiple Active and Advanced Passive Search Modes allow you to distinguish between the target and adjacent lines.


Active & Passive Search Modes

Four active trace frequencies in the SR-20 provide the versatility needed to diagnose complex locates. Passive search modes locate any signal radiated from metallic lines within a given frequency range – without the use of a transmitter.

- Multiple active frequencies to verify the locate.
- Advanced passive modes to verify the locate and find unknown lines.
- Now you can combine active and passive search modes to effectively sweep an area for more *Accuracy* and *Confidence*.

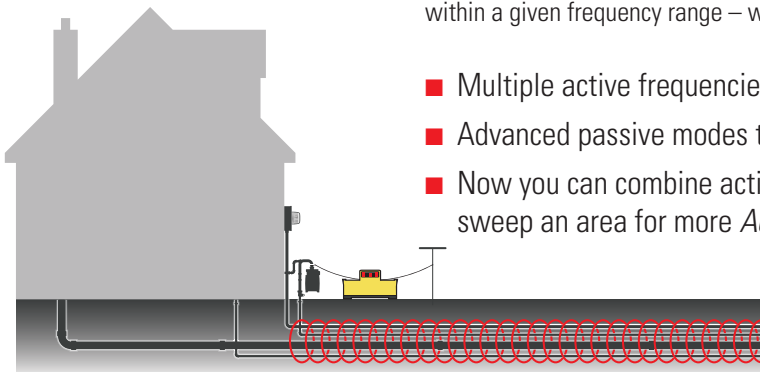

Active Signal

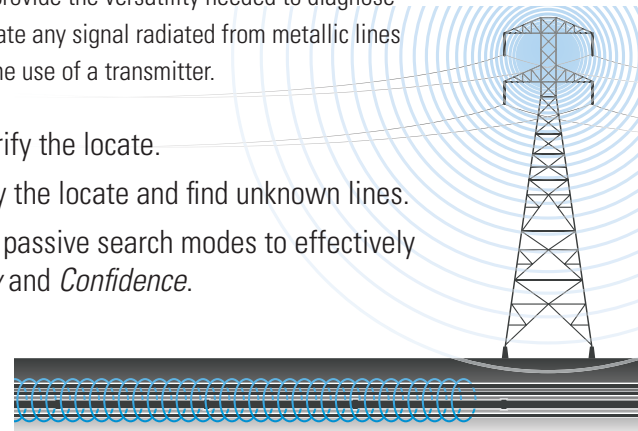

Passive Signal

RIDGID SeekTech Advantages

| | SeekTech SR-20 | Conventional Locators |
|----------------------------------|----------------|-----------------------|
| Display | Mapping | Digital/Analog |
| Line Direction | Displayed | N/A |
| Depth | Continual | Push Button |
| Current | Automatic | Push Button |
| Distortion | Displayed | N/A |
| Omni-Directional Antennas | Yes | No |
| All Needed Information | On One Screen | On Multiple Screens |



Confidence Missing a mark can be costly. The information provided by the SR-20, combined with your expertise, allows you to work through difficult locates and mark lines with confidence.

- Instant feedback to determine a good or distorted signal.
- Find branch lines coming in from other directions.
- Find lines you didn't even know existed.

Better Information → More Knowledge → Greater Confidence!

RIDGID SeekTech Transmitters

Combine the RIDGID SeekTech SR-20 with the RIDGID SeekTech ST-305 or ST-510 Transmitter for your complete locate package.

The ST-305 and ST-510 transmit a signal onto a buried metallic line or cable in one of three ways:

- Direct-connect using attached clips.
- Induction from the optional Inductive Signal Clamp.
- Induction from the transmitter coils.

ST-305

- **Power** – 5 Watts of variable power.
– 4 frequencies.
- **Speed** – Audio feedback confirms a good circuit.
- **Versatility** – Transmits two frequencies simultaneously.



ST-510

- **Power** – 10 Watts of variable power.
– 5 frequencies.
- **Speed** – LCD provides instant visual feedback on line resistance, current flow and power.
- **Versatility** – Two 50-foot lead wires allow for extending the leads when needed.



Inductive Signal Clamp

- Fits around 4-inch lines.
- LED lights verify operation and ring closure.
- Can extend by attaching rod to 1/4" size inch thread.



The SR-20's Mapping Display

Shows All The Information You Need For Faster, More Productive Locating.

Understanding the locate signal is critical to your speed, accuracy and confidence.

The SR-20 continually displays four distinct locate indicators so you can:

- Quickly determine a good locate signal.
- See changes to the target's signal as they happen.
- Continually verify the quality of the locate.

...All on one screen.

Speed The added information provide by RIDGID locators helps operators cut through the confusion and offers greater certainty when locating.

- Changes in line direction are displayed as they happen.
- Maximum signal and left-right guidance arrows are continually displayed along with depth and current.
- Additional lines approaching from multiple directions can be quickly identified.



"The combination of signal strength, directional arrows and line direction was very easy to use. Fantastic! It really helped with the locate."

— John Mogilka, Q.A. Supervisor, On Target Utility Services

SR-20 Specifications

| | | |
|---------------------|--------------------|---|
| Weight: | 3.9 lbs./1.8 kg | |
| Power Source: | 4-C Size Batteries | |
| Locate Frequencies: | Active Modes: | Line tracing frequencies: 128 Hz, 1 kHz, 8 kHz and 33 kHz |
| | Passive Modes: | Power - 50/60 Hz; Radio - 4-15 kHz and 15-36 kHz |
| | Sonde Modes: | 16 Hz, 512 Hz, 640 Hz, 16 kHz, 33 kHz |

Transmitter Specifications

Specifications – ST-305

| | |
|-------------------------------|-------------------------------|
| Frequencies: | 1 kHz, 8 kHz, 33 kHz, 262 kHz |
| Output Power: | 5 Watts, Variable |
| Output: | Any 2 Frequencies |
| Weight: | 2.4 lbs. |
| Maximum Open Circuit Voltage: | 240 VAC 50/60 Hz |
| Power Source: | 6-C Size Batteries |

Specifications – ST-510

| | |
|-------------------------------|---------------------------------------|
| Frequencies: | 128 Hz, 1 kHz, 8 kHz, 33 kHz, 262 kHz |
| Output Power: | 10 Watts, Variable |
| Display: | LCD |
| Weight: | 8.9 lbs. |
| Maximum Open Circuit Voltage: | 240 VAC 50/60 Hz |
| Power Source: | 8-D Size Batteries |

Ordering Information

| Cat. No. | Description | Weight |
|----------|--|-----------------|
| 21893 | SeekTech SR-20 Line Locator | 3.9 lbs./1.8 kg |
| 21898 | SeekTech ST-305 Transmitter (5 Watts) | 2.4 lbs./1.1 kg |
| 21903 | SeekTech ST-510 Transmitter (10 Watts) | 8.9 lbs./4.0 kg |
| 20973 | Inductive Signal Clamp | 2.5 lbs./1.1 kg |



To learn more or to schedule a demonstration, contact Ridge Tool at 800.769.7743 or www.ridgid.com/seektech.

RIDGID
Tools For The Professional™

Ridge Tool Company • Elyria, Ohio U.S.A.

1-800-769-7743

www.ridgid.com


EMERSON
Professional Tools